


HBRA10200BCT & HBRA10200HCT

10.0AMPS. SCHOTTKY BARRIER RECTIFIERS

FEATURE

- . High current capability
- . Low forward voltage drop
- . Low power loss, high efficiency
- . High surge capability
- . High temperature soldering guaranteed
260°C /10seconds, 0.25"(6.35mm)from case.




TO-263-2L
HBRA10200BCT



TO-262-3L
HBRA10200HCT

MECHANICAL DATA

- . Case: Molded with UL-94 Class V-0 recognized
Flame Retardant Epoxy
- . Mounting position: any



Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

MAXIMUM RATINGS (T_C=25°C unless otherwise noted)

| Parameter | Symbol | HBRA10200BCT & HBRA10200HCT | Units |
|---|-----------------------------------|-----------------------------|-------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 200 | V |
| Maximum RMS Voltage | V _{RMS} | 140 | V |
| Maximum DC blocking Voltage | V _{DC} | 200 | V |
| Maximum Average Forward Rectified Current <i>Per Leg</i> at T _C =100°C <i>Total device</i> | I _{F(AV)} | 5.0 10.0 | A |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method) <i>Per Leg</i> | I _{FSM} | 120.0 | A |
| Typical Junction Capacitance (Note 1) | C _J | 60 | pF |
| Operation Junction Temperature and Storage Temperature | T _J , T _{STG} | -55 to +175 | °C |

ELECTRICAL CHARACTERISTICS - (Per Leg) (T_C=25°C unless otherwise noted)

| Parameter | Symbol | Test conditions | Typ | Max | Units | |
|-------------------------|----------------|-----------------------|----------------------|------|-------|----|
| Forward voltage drop | V _F | T _J =25°C | I _F =2A | 0.76 | ---- | V |
| | | | I _F =5A | 0.83 | 0.90 | |
| | | T _J =125°C | I _F =2A | 0.61 | ---- | |
| | | | I _F =5A | 0.69 | 0.80 | |
| Reverse leakage current | I _R | T _J =25°C | V _R =200V | ---- | 20 | uA |
| | | T _J =125°C | V _R =200V | ---- | 5 | mA |

THERMAL CHARACTERISTICS (T_C=25°C unless otherwise noted)

| Parameter | Symbol | HBRA10200BCT | HBRA10200HCT | Units |
|-------------------------------------|-------------------|--------------|--------------|-------|
| Typical Thermal Resistance (Note 2) | R _(JC) | 2.0 | 2.0 | °C/W |

Notes:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
2. Thermal Resistance from Junction to Case

RATING AND CHARACTERISTIC CURVES

FIG1-TYPICAL FORWARD CURRENT DERATING CURVE

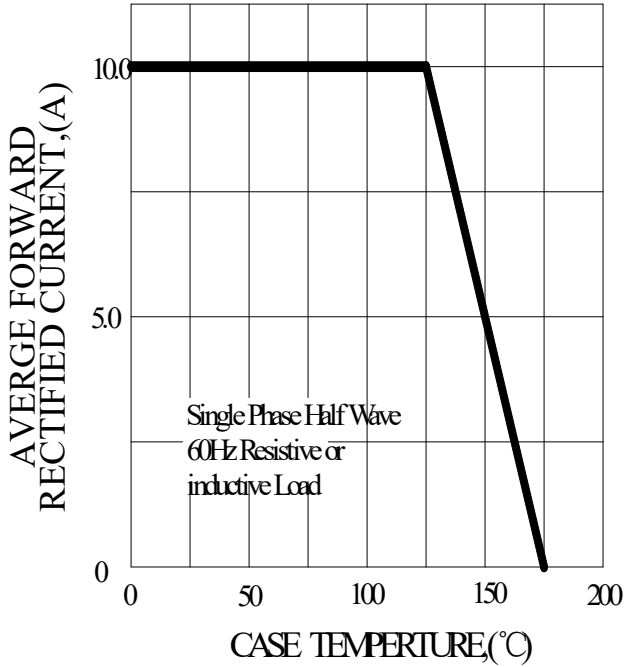


FIG2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

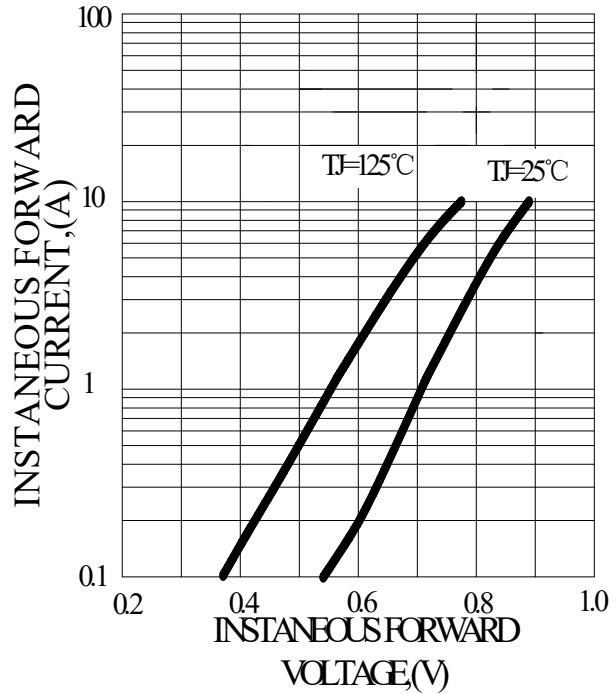


FIG3-MAXIMUM NON-REPEITIVE FORWARD SURGE CURRENT



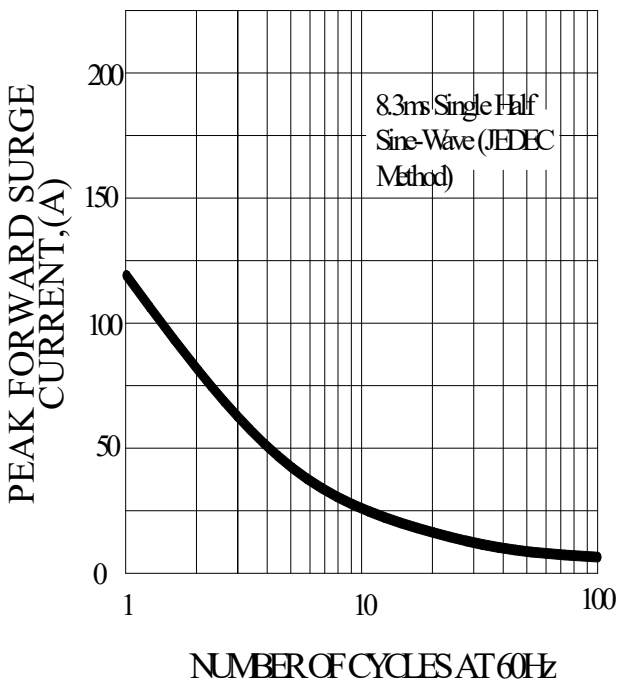


FIG4-TYPICAL REVERSE CHARACTERISTICS

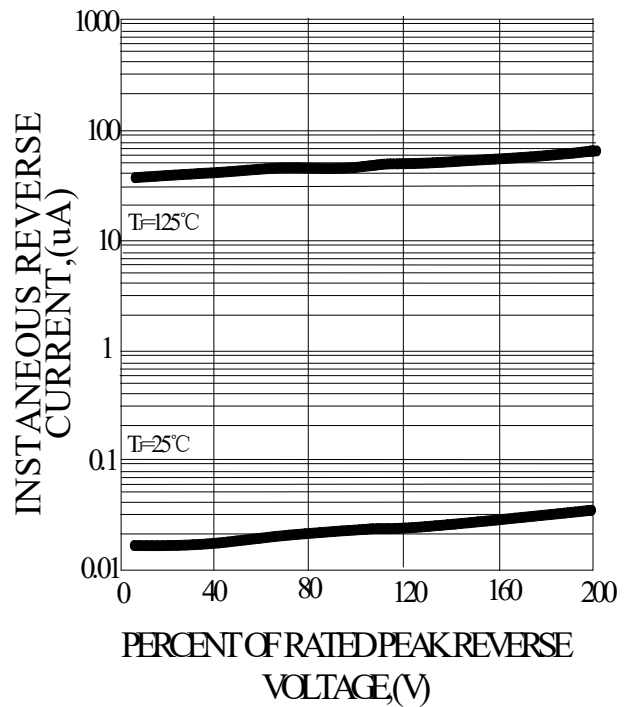


TO-263-2L PACKAGE OUTLINE

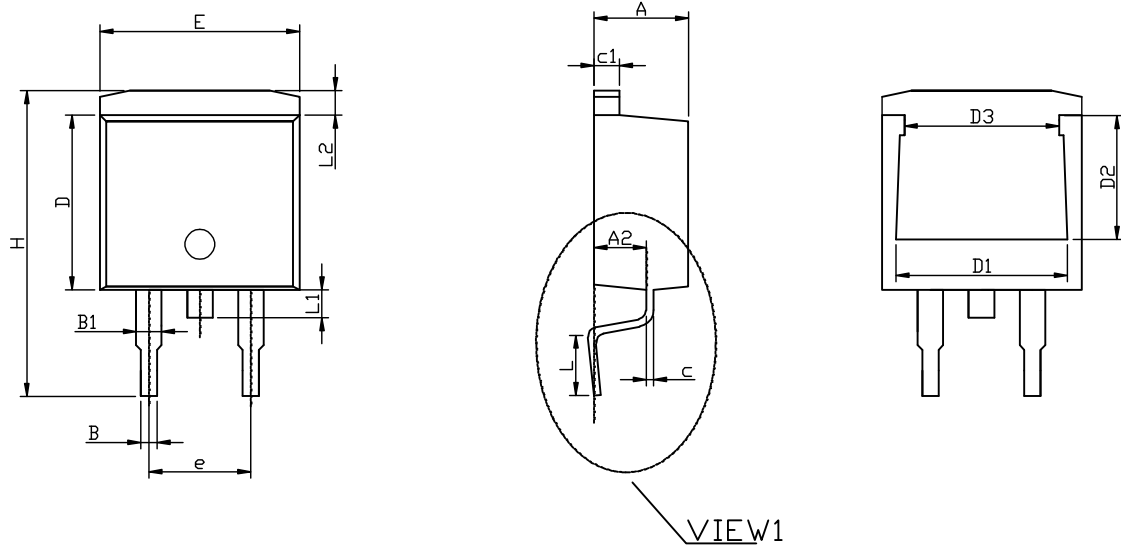

VIEW1

RECOMMENDED LAND PATTERN

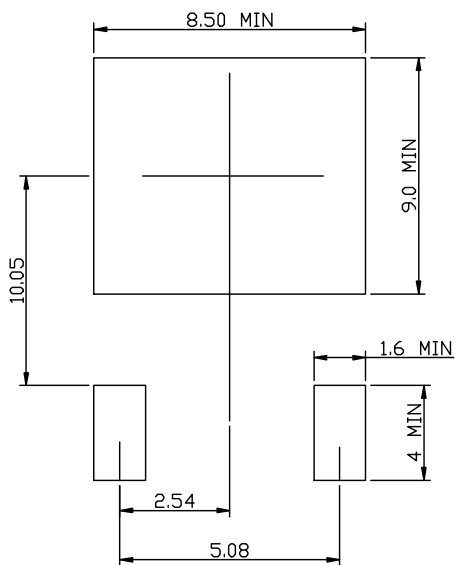


| | MIN | NOM | MAX |
|----|-------|---------|-------|
| A | 4.50 | 4.70 | 4.90 |
| A1 | 0.05 | 0.15 | 0.30 |
| A2 | 2.45 | 2.60 | 2.70 |
| B | 0.72 | 0.82 | 0.92 |
| B1 | 1.12 | 1.27 | 1.42 |
| c | 0.28 | 0.38 | 0.48 |
| c1 | 1.17 | 1.27 | 1.37 |
| D | 8.46 | 8.66 | 8.86 |
| D1 | 7.90 | 8.10 | 8.40 |
| D2 | 5.50 | 5.70 | 5.90 |
| D3 | 7.10 | 7.30 | 7.50 |
| E | 9.85 | 10.15 | 10.45 |
| e | | 5.08BCS | |
| H | 14.75 | 15.15 | 15.55 |
| L | 2.30 | 2.55 | 2.80 |
| L1 | 1.20 | 1.40 | 1.60 |
| L2 | 1.01 | 1.23 | 1.50 |
| θ | 0° | 7° | 8° |

UNIT: mm

TO-262-3L PACKAGE OUTLINE



RECOMMENDED LAND PATTERN

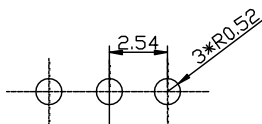

UNIT: mm

| | MIN | NOM | MAX |
|----|-------|-------|-------|
| A | 4.50 | 4.70 | 4.90 |
| A1 | 2.45 | 2.60 | 2.70 |
| B | 0.72 | 0.82 | 0.92 |
| B1 | 1.12 | 1.27 | 1.42 |
| c | 0.28 | 0.38 | 0.48 |
| c1 | 1.17 | 1.27 | 1.37 |
| D | 8.46 | 8.66 | 8.86 |
| D1 | 7.90 | 8.10 | 8.40 |
| D2 | 5.50 | 5.70 | 5.90 |
| D3 | 7.10 | 7.30 | 7.50 |
| E | 9.85 | 10.15 | 10.45 |
| e | | 2.54 | |
| H | 23.20 | 23.60 | 24.00 |
| L | 13.10 | 13.60 | 14.10 |
| L1 | 3.85 | 4.05 | 4.35 |
| L2 | 1.01 | 1.23 | 1.50 |